



**Please Read!** Please read and understand these instructions completely before installation to avoid possible injury to yourself, or damage to the accessory or vehicle. Read all **Cautions, Warnings** and **Notes** within installation instructions and on bags. If you are unsure about securing the bag, please contact us at 1-800-558-7755 ext. 123. Monday through Friday 8:00 am - 4:30 pm CST

### ! WARNING

- \*Secure the bag to the vehicle so the bag will not shift during operation. Failure to do so may result in injury or property damage.
- \*Verify that straps do not obstruct exhaust system, reflectors, turn signals, or tail lamp. Failure to do so may result in injury or property damage.
- \*Allowing straps to hang loose may cause damage to product and/or painted finishes. Hanging straps may become entangled in the wheel or drive chain or belt resulting in serious personal injury and/or property damage.


### 1. PARTS LIST:

This Product contains the following components. Before beginning installation confirm there are no missing or damaged components.

Item #	Description	Qty
1.	Rain Hood	1

### 2. PREPARATION:

- a. Mount luggage to bike as instructed by the luggage manufacturer.
- b. All straps on rain hood should be extended to the fully opened position. (Fig. 1)
- c. All cords and Straps on rain hood should be extended to the fully opened position. (Fig. 1)

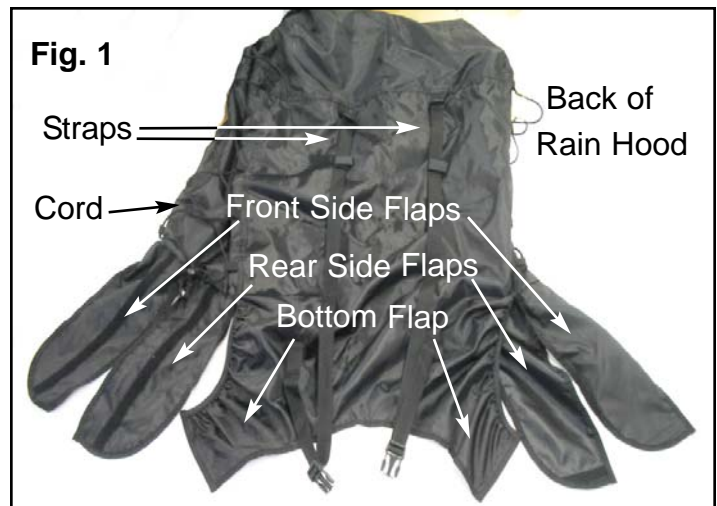


### 3. INSTALLATION:

- a. Place rain hood over luggage so that the large bottom flap hangs to the rear of bike (Fig. 2)
- b. Adjust straps and cord so that the opening of the rain hood is level with the bottom of the rack.



- c. Fold front side flaps under the luggage rack making sure that the flap Velcro is tightly secured to each other. (Fig. 3)
- d. Repeat step "C" with the rear side flaps.
- e. Fold large bottom flap under luggage rack and secure velcro to the back of rain hood inside the back pocket. (Fig.4 )
- f. Connect Male quick release buckles to the corresponding female buckles and tighten straps. (Fig. 5)
- g. Look over bag and make sure all straps and cords are tight and that the rain hood is form fit to the luggage. (Figs. 6 & 7)
- h. Wrap Velcro located on the loose end of all adjustable straps, around the strap and secure to prevent flapping in the wind. (Fig. 8)
- i. Pass loose cord through tightened cord and tie off to prevent flapping in the wind. (Fig. 9 )

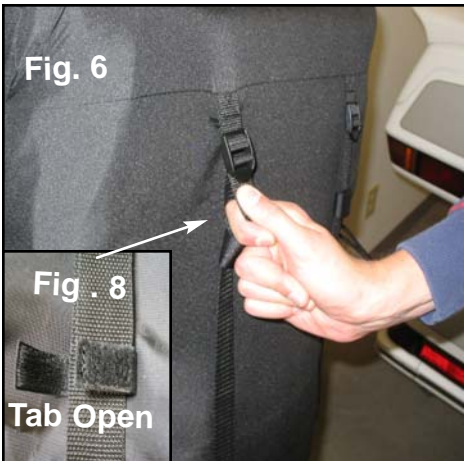

#### 4. MAINTENANCE:

Periodically check Compression or bag. Re-adjust and/or re-tighten as required.

#### 5. CARE AND CLEANING:

Wash using mild house hold detergent and soft brush to remove dirt or road grime. Rinse thoroughly and dry before using. Do not put in washer or dryer, dry cleaning is not recommended.

#### 6. CUSTOMER SERVICE:

For further information contact Dowco inc. at  
 DOWCO Inc.  
 4230 Clipper Dr.  
 Manitowoc, WI 54220 USA  
 Phone: 1-800-558-7755  
 Fax: 920-682-5891  
 email: feedback@dowco-inc.com